



9105

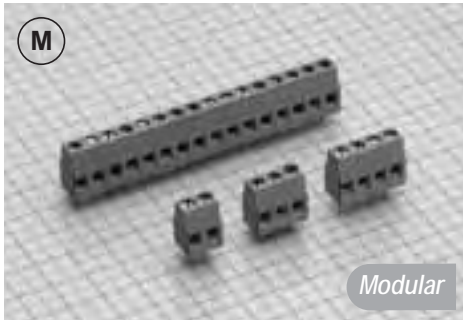

Medium Terminal Block
STRAIGHT

Wire Size	30-12AWG (2.5/1.5 mm²)		
Operating Temp	230° F (110° C)		
Housing Height	15.2 mm		
Max Current	24A		
Holes Center to Center	5-5.08 mm	7.5-7.62 mm	10-10.16 mm
Max Voltage	300V	750V	750V
Positions	2 to 25	2 to 4 2 to 3	2 to 13


9115

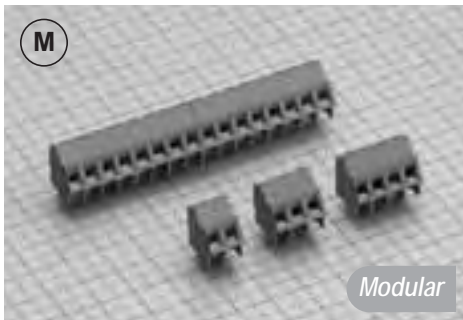

Medium Terminal Block
35°

Wire Size	30-12AWG (2.5/1.5 mm²)		
Operating Temp	230° F (110° C)		
Housing Height	15 mm		
Max Current	24A		
Holes Center to Center	5-5.08 mm	7.5-7.62 mm	10-10.16 mm
Max Voltage	300V	750V	750V
Positions	2 to 12 2 to 25	2 to 12	2 to 6 2 to 13


9135

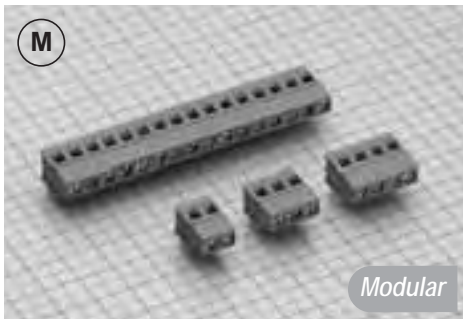


Medium Terminal Block
90°

Wire Size	30-12AWG (2.5/1.5 mm²)		
Operating Temp	230° F (110° C)		
Housing Height	9 mm		
Max Current	24A		
Holes Center to Center	5-5.08 mm	7.5-7.62 mm	10-10.16 mm
Max Voltage	300V	750V	750V
Positions	2 to 25	2 to 4 2 to 3	2 to 13


9105 Medium Terminal Block, Straight

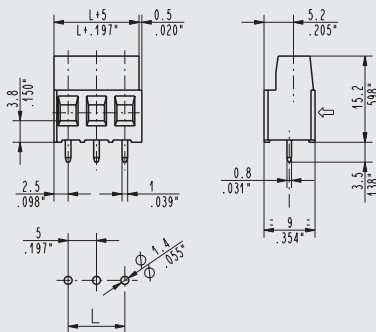

9115 Medium Terminal Block, 35°

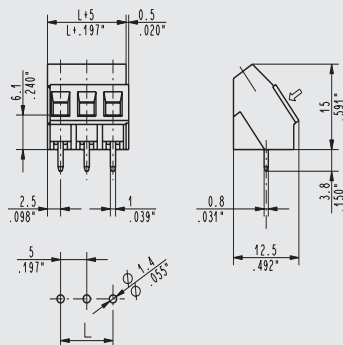

9135 Medium Terminal Block, 90°

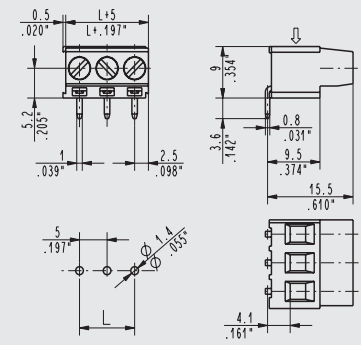

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.



Curtis Industries
A Division of Powers Holdings, Inc.

1-800-657-0853