


9151


9121

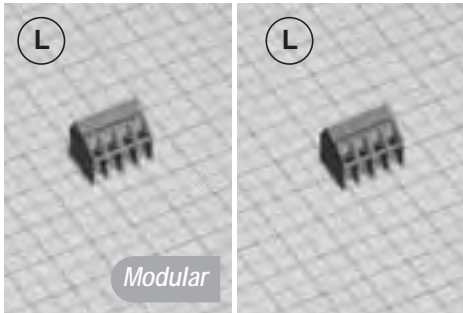

### Mini Terminal Block 55°

Wire Size	<b>30-16AWG (1.5/1 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>9.5 mm</b>	
Max Current	<b>17.5A</b>	
Holes Center to Center	<b>3.5 mm</b>	<b>7 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 18</b>	<b>1 to 9</b>


9101

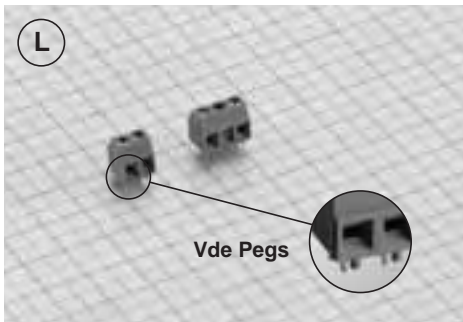

### Mini Terminal Block STRAIGHT WITH VDE PEGS

Wire Size	<b>30-16AWG (1.5/1 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>8.5 mm</b>	
Max Current	<b>17.5A</b>	
Holes Center to Center	<b>3.5-3.81 mm</b>	<b>7-7.62 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2</b>	<b>2</b>


9102

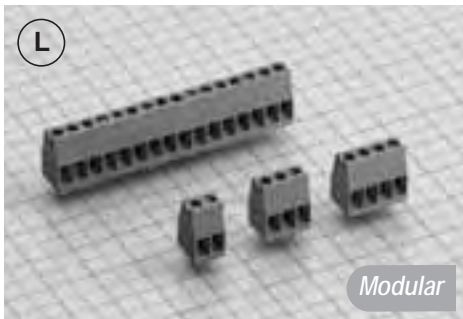


### Low Terminal Block STRAIGHT

Wire Size	<b>30-14AWG (1.5/1 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>12.6 mm</b>	
Max Current	<b>17.5A</b>	
Holes Center to Center	<b>3.5-3.81 mm</b>	<b>7-7.62 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 25</b>	<b>1 to 13</b>


9151, 9121 Mini Terminal Block,  
55°  
Modular

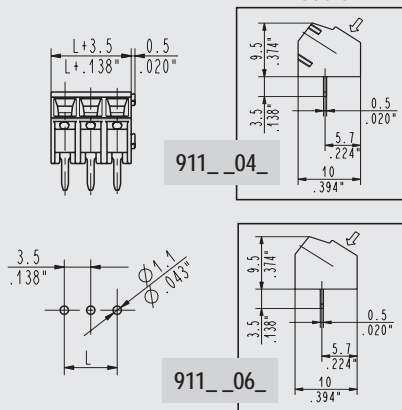

9101 Mini Terminal Block,  
Straight with Vde Pegs

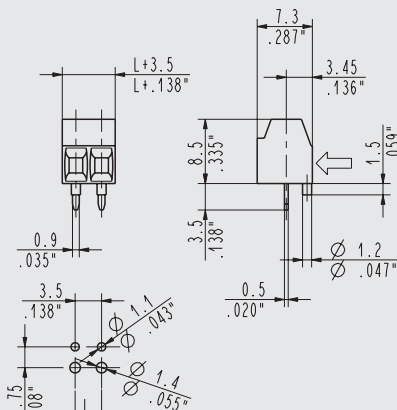

9102 Low Terminal Block,  
Straight

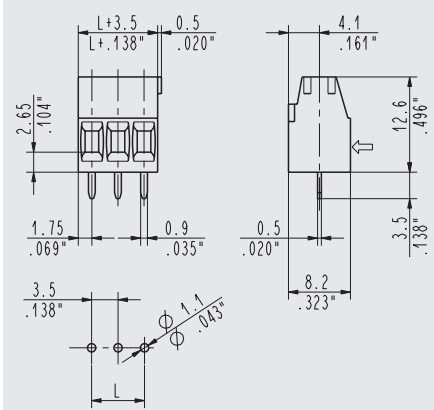

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

3