



9300

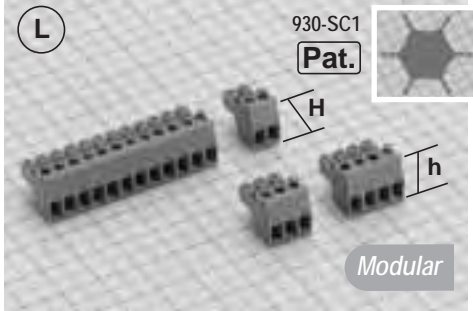

Female Connector  
MODULAR

Wire Size	30-14AWG (1.5/1 mm <sup>2</sup> )		
Operating Temp	230° F (110° C)		
Housing Height	15.5 mm / h = 11.1 mm		
Max Current	13.5A		
Holes Center to Center	3.5-3.81 mm	5-5.08 mm	7-7.62 mm
Max Voltage	300V	300V	750V
Positions	2 to 25	2 to 3	2 to 13


9350

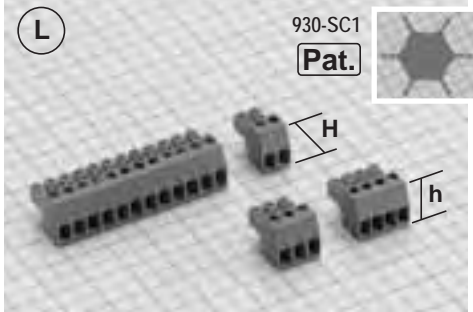

Female Connector  
SIDE STACKABLE

Wire Size	30-14AWG (1.5/1 mm <sup>2</sup> )	
Operating Temp	230° F (110° C)	
Housing Height	15.5 mm / h = 11.1 mm	
Max Current	13.5A	
Holes Center to Center	3.5-3.81 mm	7-7.62 mm
Max Voltage	300V	750V
Positions	2 to 25	2 to 13


9360

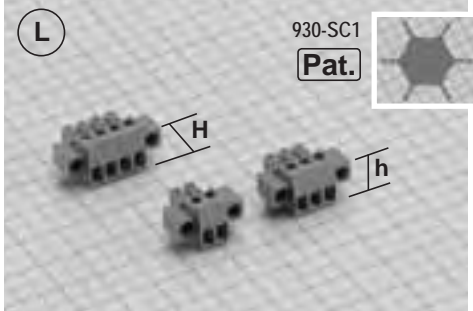


Female Connector  
WITH LOCKING SCREW FLANGES

Wire Size	30-14AWG (1.5/1 mm <sup>2</sup> )	
Operating Temp	230° F (110° C)	
Housing Height	15.5 mm / h = 11.1 mm	
Max Current	13.5A	
Holes Center to Center	3.5-3.81 mm	7-7.62 mm
Max Voltage	300V	750V
Positions	2 to 23	2 to 12


9300 Female Connector, Modular

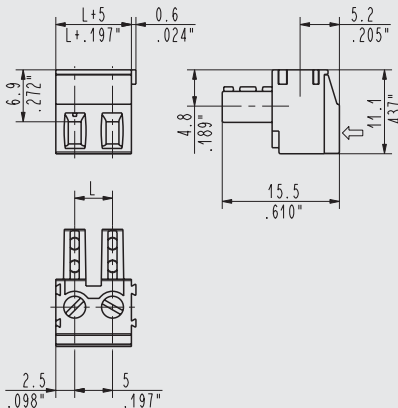

9350 Female Connector, Side Stackable

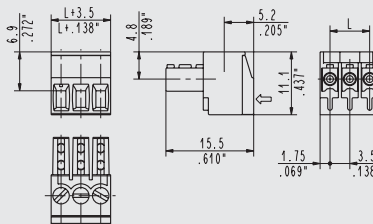

9360 Female Connector, with Locking Screw Flanges

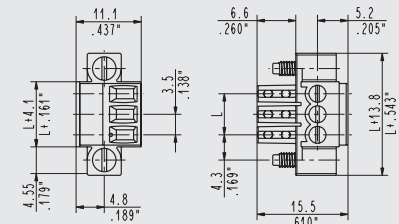

FEMALE CONNECTORS 93 SERIES

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

19