



Female Connector
STRAIGHT, 90°-270°, SIDE STACKABLE

Wire Size	30-14AWG (2.5/1.5 mm²)	
Operating Temp	230° F (110° C)	
Housing Height	14 mm / h = 11.5 mm	
Max Current	15A	
Holes Center to Center	5 mm	10 mm
Max Voltage	300V	750V
Positions	2 to 25	2 to 13

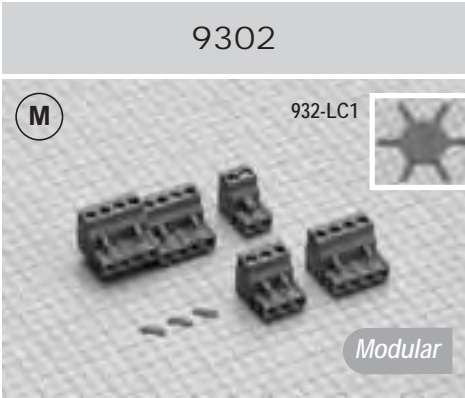

Female Connector
MODULAR

Wire Size	30-12AWG (2.5/1.5 mm²)	
Operating Temp	230° F (110° C)	
Housing Height	18.4 mm / h = 15.5 mm	
Max Current	15A	
Holes Center to Center	5-5.08 mm	
Max Voltage	300V	
Positions	2 to 4	

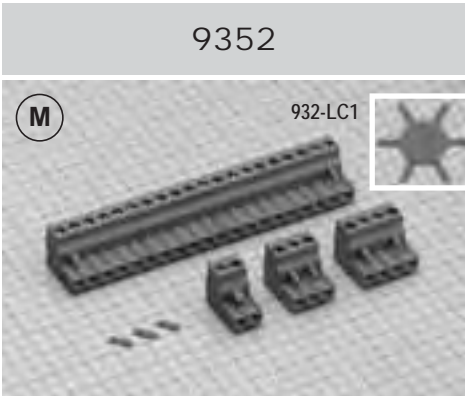

Female Connector
SIDE STACKABLE

Wire Size	30-12AWG (2.5/1.5 mm²)		
Operating Temp	230° F (110° C)		
Housing Height	18.4 mm / h = 15.5 mm		
Max Current	15A		
Holes Center to Center	5-5.08 mm	7.5-7.62 mm	10-10.16 mm
Max Voltage	300V	750V	750V
Positions	2 to 25	2 to 12	2 to 13

