



**9351 Industrial Use**

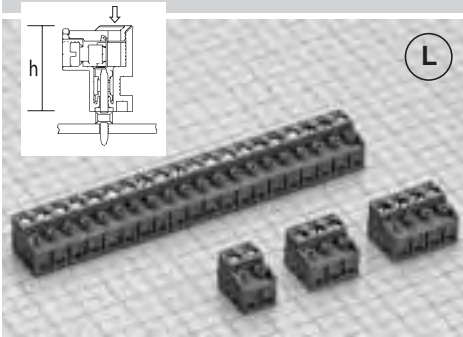

**Female Connector  
STRAIGHT, SIDE STACKABLE**

Wire Size	<b>30-14AWG (2.5/1.5 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>14 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5 mm</b>	<b>10 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 25</b>	<b>2 to 13</b>


**9311 Industrial Use**

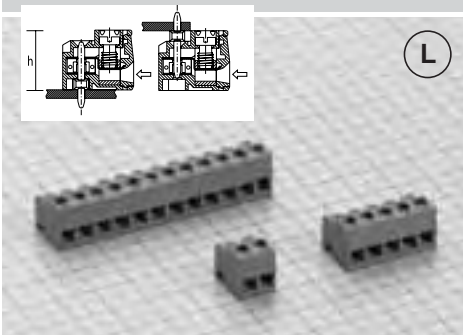

**SAFE Female Connector  
90°-270°, SIDE STACKABLE**

Wire Size	<b>30-14AWG (2.5/1.5 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>11.3 mm</b>	
Max Current	<b>13.5A</b>	
Holes Center to Center	<b>5 mm</b>	<b>10 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 25</b>	<b>2 to 13</b>

**9301 Industrial Use**

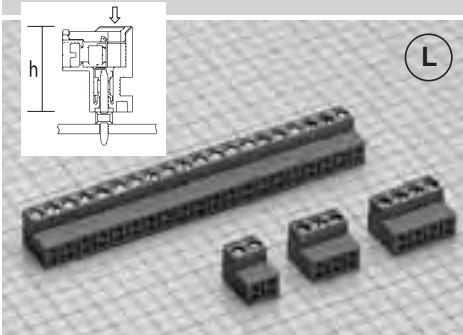

**Female Connector  
STRAIGHT, MODULAR**

Wire Size	<b>30-14AWG (2.5/1.5 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>14 mm</b>	
Max Current	<b>13.5A</b>	
Holes Center to Center	<b>5 mm</b>	<b>10 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 25</b>	<b>2 to 13</b>

