## 9355

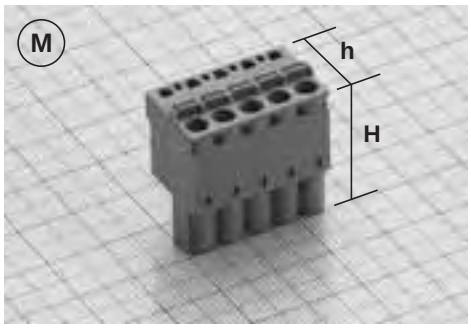


### Spring Female Connector
**SIDE STACKABLE, SCREWLESS**

| | | |
|---|---|---|
| Wire Size | 30-12AWG (2.5/2.5 mm²) | |
| Operating Temp | 230° F (110° C) | |
| Housing Height | 25.4 mm / h = 14.9 mm | |
| Max Current | 12A | |
| Holes Center to Center | 5-5.08 mm | 10-10.16 mm |
| Max Voltage | 300V | 600V |
| Positions | 2 to 18 \| 2 to 8 | 2 to 9 \| 2 to 4 |

## 9361 *Industrial Use*

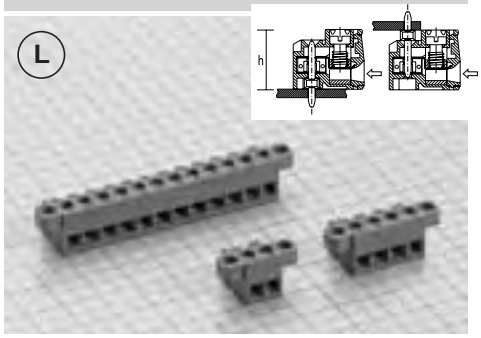


### Safe Female Connector
**90°-270° WITH LOCKING SCREW FLANGES**

| | | |
|---|---|---|
| Wire Size | 30-14AWG (2.5/1.5 mm²) | |
| Operating Temp | 230° F (110° C) | |
| Housing Height | 11.3 mm | |
| Max Current | 13.5A | |
| Holes Center to Center | 5 mm | 10 mm |
| Max Voltage | 300V | 750V |
| Positions | 2 to 23 | 2 to 12 |



9355 **Spring Female Connector, Side Stackable, Screwless**

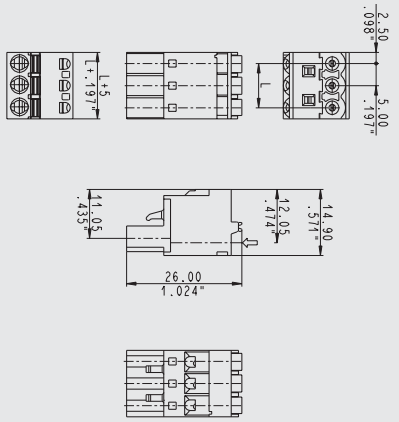


9361 **Safe Female Connector, 90°-270° with Locking Screw**

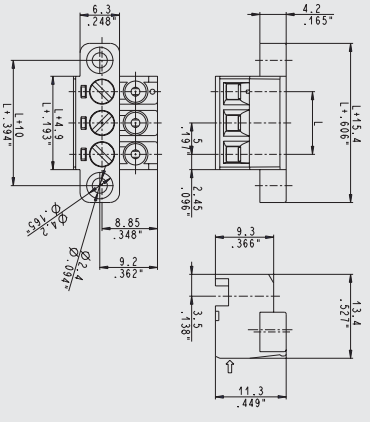




Curtis Industries
A Division of Powers Holdings, Inc.

Specifications subject to change.
Dimensions are shown for reference purposes only.