


9363

**Female Connector  
VERTICAL RIGHT WITH LOCKING SCREW FLANGES**


Wire Size	<b>30-12AWG (2.5/1.5 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>25 mm / h = 12.5 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5-5.08 mm</b>	<b>10-10.16 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 8   2 to 23</b>	<b>2 to 4   2 to 12</b>

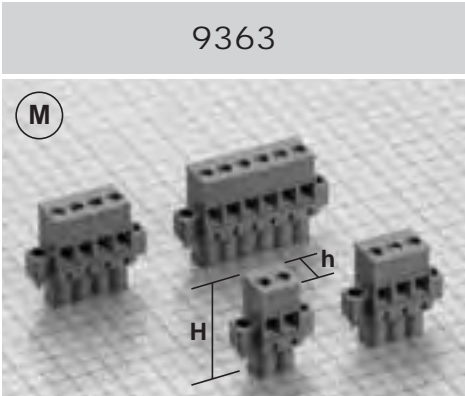

9363

**Female Connector  
VERTICAL LEFT WITH LOCKING SCREW FLANGES**

Wire Size	<b>30-12AWG (2.5/1.5 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>25 mm / h = 12.5 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5-5.08 mm</b>	<b>10-10.16 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 8   2 to 23</b>	<b>2 to 4   2 to 12</b>

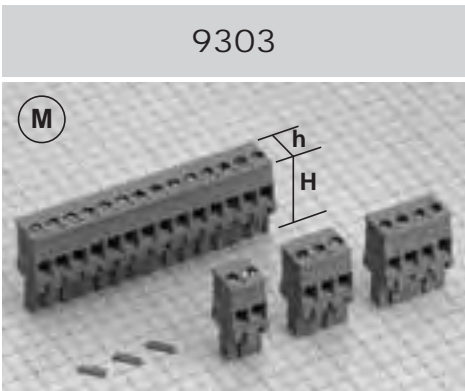

9303

**Female Connector  
VERTICAL RIGHT, MODULAR**

Wire Size	<b>30-12AWG (2.5/1.5 mm<sup>2</sup>)</b>	
Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>25 mm / h = 12.5 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5-5.08 mm</b>	<b>10-10.16 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 12</b>	<b>2 to 6</b>

