9401

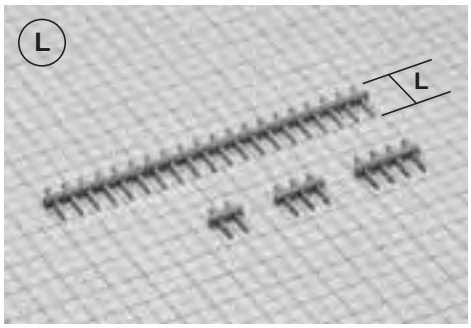

Male Connector
STRAIGHT, SIDE STACKABLE

Operating Temp	230° F (110° C)	
Housing Height	12.5 mm	
Max Current	15A	
Holes Center to Center	5 mm	10 mm
Max Voltage	300V	750V
Positions	2 to 25	2 to 13

9412

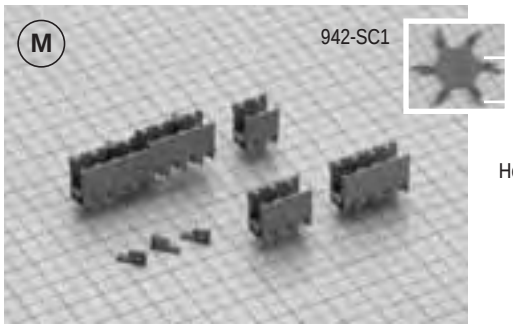

Male Connector
STRAIGHT, MODULAR

Operating Temp	230° F (110° C)
Housing Height	12 mm
Max Current	15A
Holes Center to Center	5-5.08 mm
Max Voltage	300V
Positions	2 to 4

9402

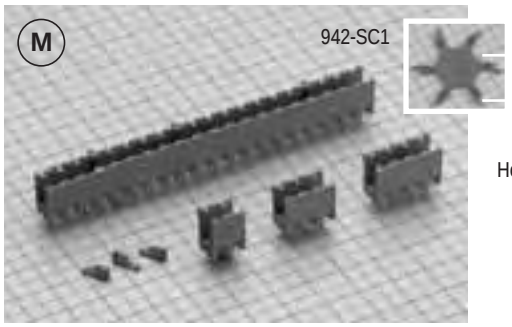

Male Connector
STRAIGHT,SIDE STACKABLE

Operating Temp	230° F (110° C)		
Housing Height	12 mm		
Max Current	15A		
Holes Center to Center	5-5.08 mm	7-7.62 mm	10-10.16 mm
Max Voltage	300V	750V	750V
Positions	2 to 25	2 to 12	2 to 13

9401 Male Connector, Straight, Side Stackable

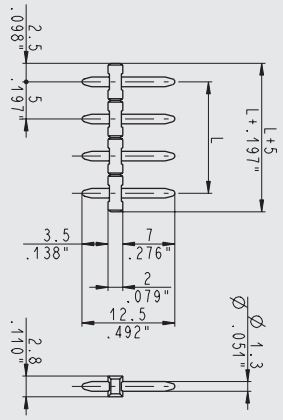

9412 Male Connector, Straight, Modular

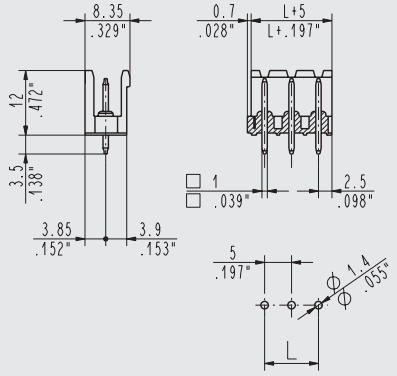

9402 Male Connector, Straight, Side Stackable

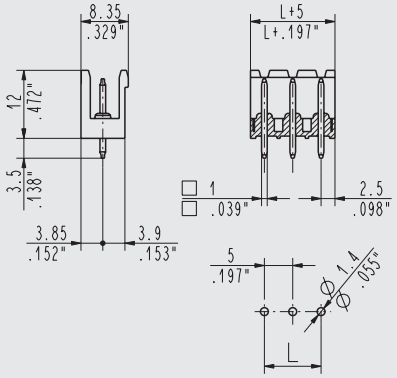

Curtis Industries
A Division of Powers Holdings, Inc.

Specifications subject to change.
Dimensions are shown for reference purposes only.