



**Male Connector  
45°, SIDE STACKABLE**

Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>14.8 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5-5.08 mm</b>	<b>10-10.16 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 25   2 to 8</b>	<b>2 to 13   2 to 4</b>

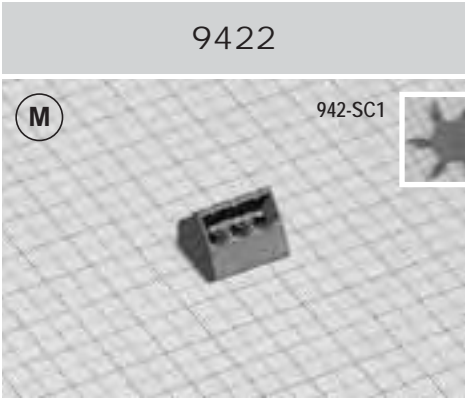

**Male Connector  
45°, POLARIZED**

Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>14.8 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5-5.08 mm</b>	<b>10-10.16 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 25   2 to 8</b>	<b>2 to 13   2 to 4</b>

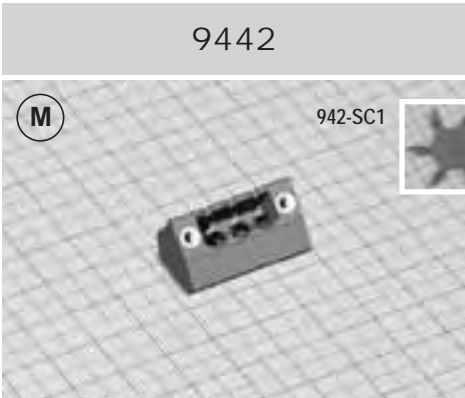

**Male Connector  
45° WITH LOCKING SCREW FLANGES**

Operating Temp	<b>230° F (110° C)</b>	
Housing Height	<b>14.8 mm</b>	
Max Current	<b>15A</b>	
Holes Center to Center	<b>5-5.08 mm</b>	<b>10-10.16 mm</b>
Max Voltage	<b>300V</b>	<b>750V</b>
Positions	<b>2 to 23   2 to 6</b>	<b>2 to 12   2 to 3</b>

