



**Male Connector
90° WITH LOCKING SCREW FLANGES**

Operating Temp	230° F (110° C)	
Housing Height	8.35 mm	
Max Current	15A	
Holes Center to Center	5-5.08 mm	10-10.16 mm
Max Voltage	300V	750V
Positions	2 to 8 2 to 23	2 to 4 2 to 12

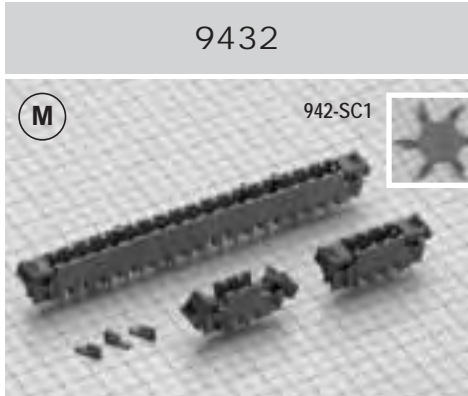

**Male Connector
STRAIGHT WITH EJECTORS**

Operating Temp	230° F (110° C)	
Housing Height	14.5 mm	
Max Current	15A	
Holes Center to Center	5-5.08 mm	10-10.16 mm
Max Voltage	300V	750V
Positions	2 to 21	2 to 11

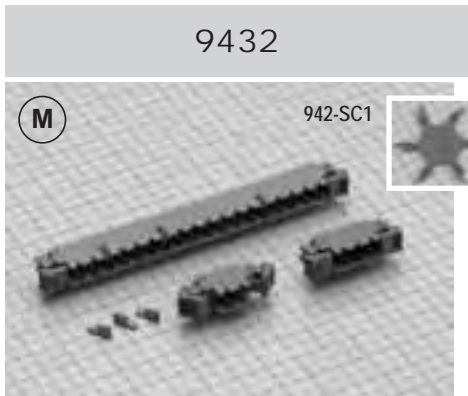

**Male Connector
90° WITH EJECTORS**

Operating Temp	230° F (110° C)	
Housing Height	8.35 mm	
Max Current	15A	
Holes Center to Center	5-5.08 mm	10-10.16 mm
Max Voltage	300V	750V
Positions	2 to 21	2 to 11

