



9225

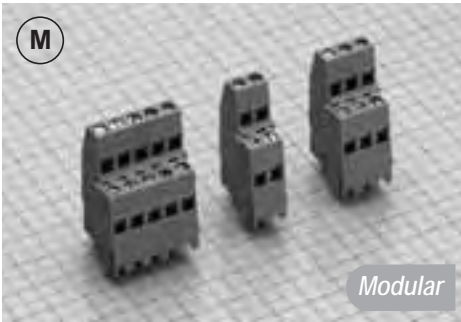

Medium Multi-Level
2nd/3rd LEVELS

Wire Size	30-12AWG (2.5/1.5 mm ²)	
Operating Temp	230° F (110° C)	
Housing Height	25.2/35.6 mm	
Max Current	24A	
Holes Center to Center	5-5.08 mm	10-10.16 mm
Max Voltage	300V	750V
Positions	2 to 3	2 to 3


9205

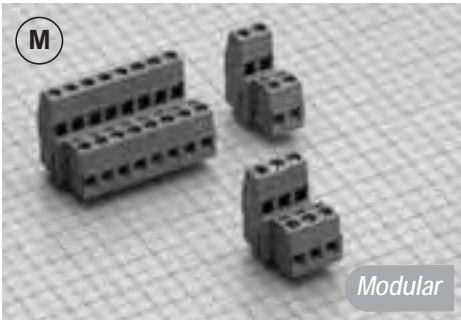

Medium Multi-Level
1st/2nd LEVELS

Wire Size	30-12AWG (2.5/1.5 mm ²)	
Operating Temp	230° F (110° C)	
Housing Height	14.8/25.2 mm	
Max Current	24A	
Holes Center to Center	5-5.08 mm	10-10.16 mm
Max Voltage	300V	750V
Positions	2 to 3	2 to 3


9235

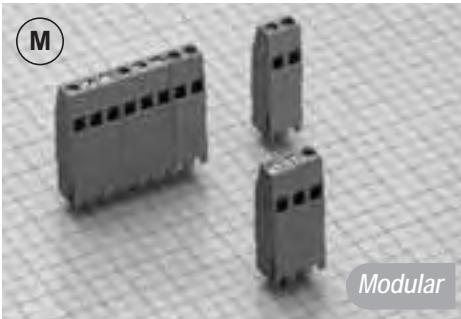


Medium Level
HIGH TOWER

Wire Size	30-12AWG (2.5/1.5 mm ²)	
Operating Temp	230° F (110° C)	
Housing Height	35.6 mm	
Max Current	24A	
Holes Center to Center	5-5.08 mm	10-10.16 mm
Max Voltage	300V	750V
Positions	2 to 3	2 to 3


9225 Medium Multi-Level,
2nd/3rd Levels

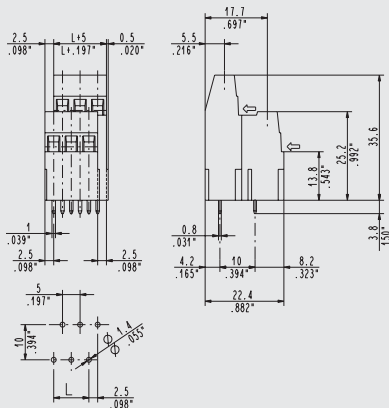

9205 Medium Multi-Level,
1st/2nd Levels

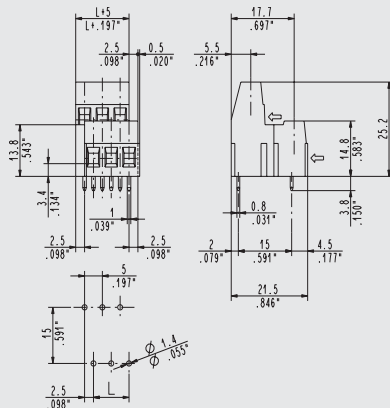

9235 Medium Level,
High Tower

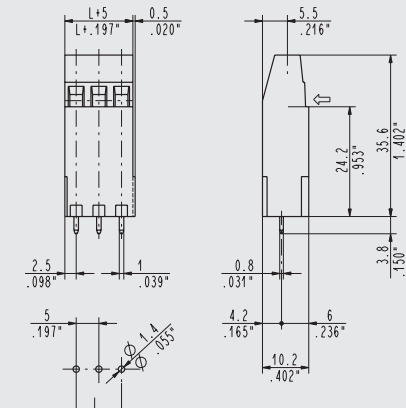

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.



Curtis Industries
A Division of Powers Holdings, Inc.

1-800-657-0853

15

MULTI-LEVEL 92 SERIES