


OK431 FV Series

8.0mm Center-to-Center Spacing

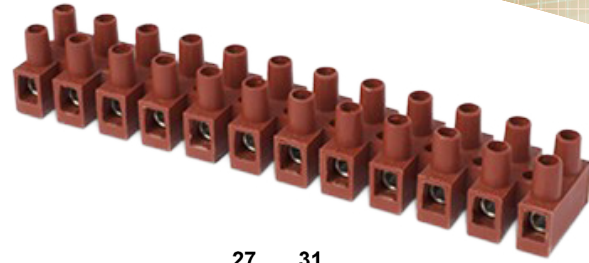


General Information


KORNER OK 431 FV Series, UL File E73420 (Distributed by Curtis Industries)

Material Information

- LP Designates Wire Protection, (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon) with 25% glass fiber
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.6 Nm (5 inch lbs) Per UL 1059
- Rated Temperature: 150°C Max
- Flame Rating: UL94 V0

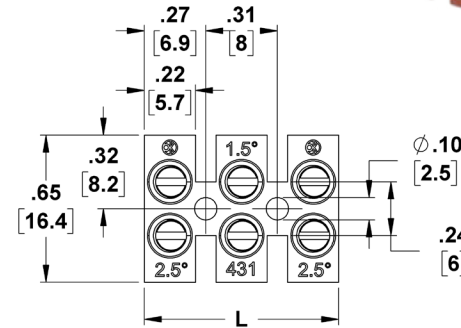

Tolerances:
 40-150mm: ±0.3mm
 150-300mm: ±0.4mm

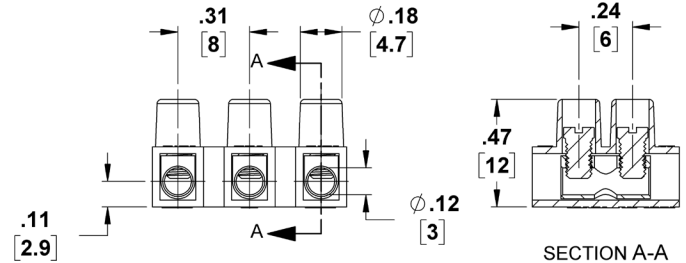

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 120°C / UL 486 E

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK431/1 FV	15A/600V (14AWG)	OK431/1 FV-LP	10A/600V (16AWG)	0.23	5.7
2	OK431/2 FV		OK431/2 FV-LP		0.54	13.7
3	OK431/3 FV		OK431/3 FV-LP		0.85	21.7
4	OK431/4 FV		OK431/4 FV-LP		1.17	29.7
5	OK431/5 FV		OK431/5 FV-LP		1.48	37.7
6	OK431/6 FV		OK431/6 FV-LP		1.80	45.7
7	OK431/7 FV	24A/450V (2.5mm ²)	OK431/7 FV-LP	17.5A/450V (1.5mm ²)	2.11	53.7
8	OK431/8 FV		OK431/8 FV-LP		2.43	61.7
9	OK431/9 FV		OK431/9 FV-LP		2.74	69.7
10	OK431/10 FV		OK431/10 FV-LP		3.06	77.7
11	OK431/11 FV		OK431/11 FV-LP		3.37	85.7
12	OK431/12 FV		OK431/12 FV-LP		3.69	93.7

