

OK432 FV Series

10.0mm Center-to-Center Spacing




General Information

KORNER OK 432 FV Series, UL File E73420 (Distributed by Curtis Industries)

Material Information

- LP Designates Wire Protection, (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon) with 25% glass fiber
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.7 Nm (6 inch lbs) Per UL 1059
- Rated Temperature: 150°C Max
- Flame Rating: UL94 V0

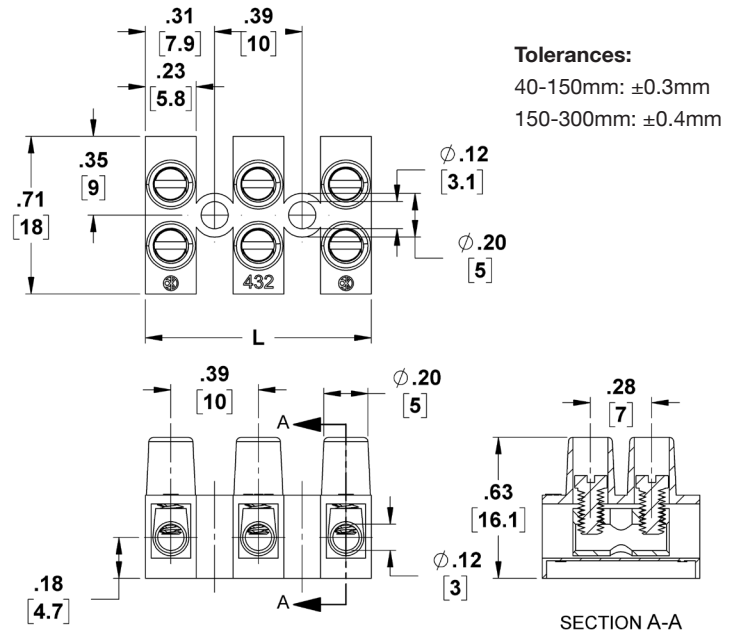

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 120°C / UL 486 E

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK432/1 FV	15A/600V (14AWG)	OK432/1 FV-LP	15A/600V (14AWG)	0.23	5.8
2	OK432/2 FV		OK432/2 FV-LP		0.62	15.8
3	OK432/3 FV		OK432/3 FV-LP		1.01	25.8
4	OK432/4 FV		OK432/4 FV-LP		1.41	35.8
5	OK432/5 FV		OK432/5 FV-LP		1.80	45.8
6	OK432/6 FV	24A/450V (2.5mm ²)	OK432/6 FV-LP	24A/450V (2.5mm ²)	2.20	55.8
7	OK432/7 FV		OK432/7 FV-LP		2.59	65.8
8	OK432/8 FV		OK432/8 FV-LP		2.98	75.8
9	OK432/9 FV		OK432/9 FV-LP		3.38	85.8
10	OK432/10 FV		OK432/10 FV-LP		3.77	95.8
11	OK432/11 FV		OK432/11 FV-LP		4.17	105.8
12	OK432/12 FV		OK432/12 FV-LP		4.56	115.8

