

OK433 FV-F Series

10.0mm Center-to-Center Spacing




General Information

KORNER OK 433 FV-F Series, UL File E73420 (Distributed by Curtis Industries)

Material Information

- FLP Designates Wire Protection, -FBC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon) with 25% glass fiber
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.8 Nm (7 inch lbs) Per UL 1059
- Rated Temperature: 150°C Max
- Flame Rating: UL94 V0

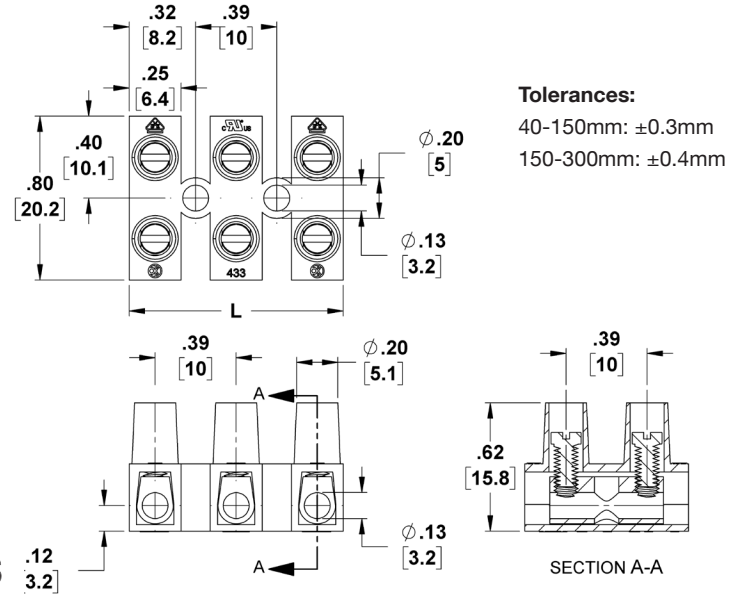

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 120°C / UL 486 E

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		with Wire Stops (-BC)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK433/1 FV-F	20A/600V (12AWG)	OK433/1 FV-FLP	20A/600V (12AWG)	OK433/1 FV-FBC	20A/600V (12AWG)	0.25	6.4
2	OK433/2 FV-F		OK433/2 FV-FLP		OK433/2 FV-FBC			
3	OK433/3 FV-F		OK433/3 FV-FLP		OK433/3 FV-FBC			
4	OK433/4 FV-F		OK433/4 FV-FLP		OK433/4 FV-FBC			
5	OK433/5 FV-F		OK433/5 FV-FLP		OK433/5 FV-FBC			
6	OK433/6 FV-F		OK433/6 FV-FLP		OK433/6 FV-FBC			
7	OK433/7 FV-F	32A/450V (4mm ²)	OK433/7 FV-FLP	24A/450V (2.5mm ²)	OK433/7 FV-FBC	32A/450V (4mm ²)	2.61	66.4
8	OK433/8 FV-F		OK433/8 FV-FLP		OK433/8 FV-FBC			
9	OK433/9 FV-F		OK433/9 FV-FLP		OK433/9 FV-FBC			
10	OK433/10 FV-F		OK433/10 FV-FLP		OK433/10 FV-FBC			
11	OK433/11 FV-F		OK433/11 FV-FLP		OK433/11 FV-FBC			
12	OK433/12 FV-F		OK433/12 FV-FLP		OK433/12 FV-FBC			

