

OK433 FV-H Series

10.0mm Center-to-Center Spacing




General Information


KORNER OK 433 FV-H Series, UL File E73420 (Distributed by Curtis Industries)

Material Information

- HLP Designates Wire Protection, -HBC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon) with 25% glass fiber
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.8 Nm (7 inch lbs) Per UL 1059
- Rated Temperature: 150°C Max
- Flame Rating: UL94 V0

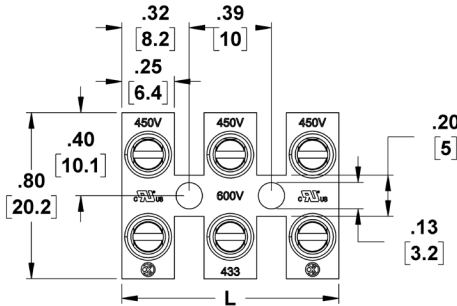

Tolerances:
 40-150mm: ±0.3mm
 150-300mm: ±0.4mm

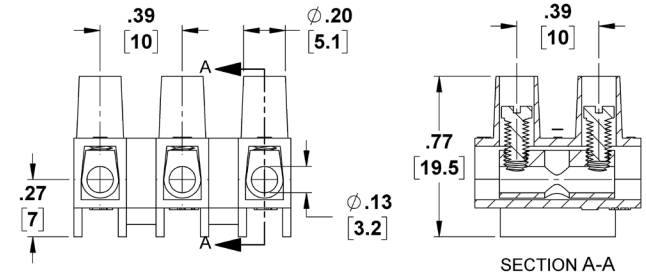

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 120°C / UL 486 E

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		with Wire Stops (-BC)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK433/1 FV-H	20A/600V (12AWG)	OK433/1 FV-HLP	20A/600V (12AWG)	OK433/1 FV-HBC	20A/600V (12AWG)	0.25	6.4
2	OK433/2 FV-H		OK433/2 FV-HLP		OK433/2 FV-HBC		0.65	16.4
3	OK433/3 FV-H		OK433/3 FV-HLP		OK433/3 FV-HBC		1.04	26.4
4	OK433/4 FV-H		OK433/4 FV-HLP		OK433/4 FV-HBC		1.43	36.4
5	OK433/5 FV-H		OK433/5 FV-HLP		OK433/5 FV-HBC		1.83	46.4
6	OK433/6 FV-H		OK433/6 FV-HLP		OK433/6 FV-HBC		2.22	56.4
7	OK433/7 FV-H	32A/450V (4mm ²)	OK433/7 FV-HLP	24A/450V (2.5mm ²)	OK433/7 FV-HBC	32A/450V (4mm ²)	2.61	66.4
8	OK433/8 FV-H		OK433/8 FV-HLP		OK433/8 FV-HBC		3.01	76.4
9	OK433/9 FV-H		OK433/9 FV-HLP		OK433/9 FV-HBC		3.40	86.4
10	OK433/10 FV-H		OK433/10 FV-HLP		OK433/10 FV-HBC		3.80	96.4
11	OK433/11 FV-H		OK433/11 FV-HLP		OK433/11 FV-HBC		4.19	106.4
12	OK433/12 FV-H		OK433/12 FV-HLP		OK433/12 FV-HBC		4.58	116.4

