

OK433 NY-F Series

10.0mm Center-to-Center Spacing




General Information

KORNER OK 433 NY-F Series, UL File E73420
(Distributed by Curtis Industries)

Material Information

- LP Designates Wire Protection, -BC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon)
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.8 Nm (7 inch lbs) Per UL 1059
- Rated Temperature: 115°C Max
- Flame Rating: UL94 V2

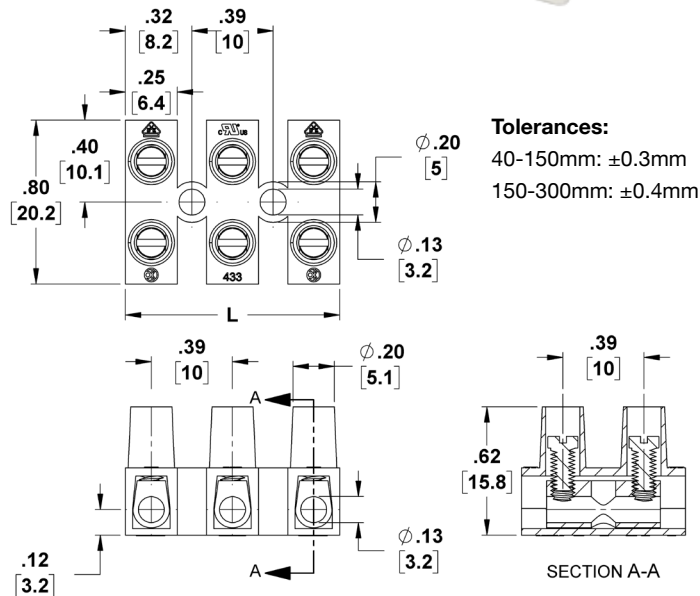

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 115°C / UL 486 E

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		with Wire Stops (-BC)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK433/1 NY-F	20A/600V (12AWG)	OK433/1 NY-FLP	20A/600V (12AWG)	OK433/1 NY-FBC	20A/600V (12AWG)	0.25	6.4
2	OK433/2 NY-F		OK433/2 NY-FLP		OK433/2 NY-FBC		0.65	16.4
3	OK433/3 NY-F		OK433/3 NY-FLP		OK433/3 NY-FBC		1.04	26.4
4	OK433/4 NY-F		OK433/4 NY-FLP		OK433/4 NY-FBC		1.43	36.4
5	OK433/5 NY-F		OK433/5 NY-FLP		OK433/5 NY-FBC		1.83	46.4
6	OK433/6 NY-F		OK433/6 NY-FLP		OK433/6 NY-FBC		2.22	56.4
7	OK433/7 NY-F	32A/450V (4mm ²)	OK433/7 NY-FLP	24A/450V (2.5mm ²)	OK433/7 NY-FBC	32A/450V (4mm ²)	2.61	66.4
8	OK433/8 NY-F		OK433/8 NY-FLP		OK433/8 NY-FBC		3.01	76.4
9	OK433/9 NY-F		OK433/9 NY-FLP		OK433/9 NY-FBC		3.40	86.4
10	OK433/10 NY-F		OK433/10 NY-FLP		OK433/10 NY-FBC		3.80	96.4
11	OK433/11 NY-F		OK433/11 NY-FLP		OK433/11 NY-FBC		4.19	106.4
12	OK433/12 NY-F		OK433/12 NY-FLP		OK433/12 NY-FBC		4.58	116.4

