

OK434 FV Series

12.0mm Center-to-Center Spacing




General Information

KORNER OK 434 FV Series, UL File E73420 (Distributed by Curtis Industries)

Material Information

- LP Designates Wire Protection, BC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon) with 25% glass fiber
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 1.1 Nm (10 inch lbs) Per UL 1059
- Rated Temperature: 150°C Max
- Flame Rating: UL94 V0

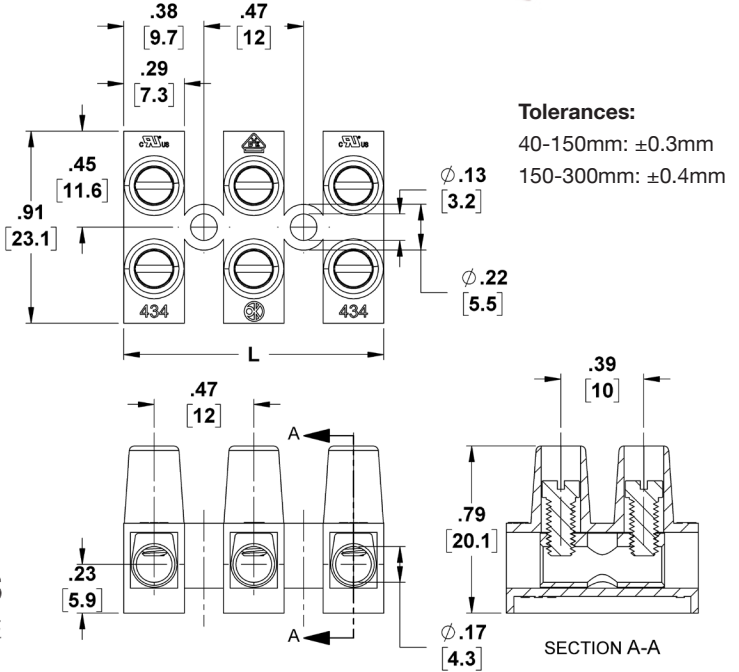

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 120°C / UL 486 E

| Number of Terminals | Standard Terminal Strip | | with Wire Protector (-LP) | | with Wire Stops (-BC) | | Length (L) | |
|---------------------|-------------------------|----------------------------------|---------------------------|---------------------------------|-----------------------|----------------------------------|------------|-------|
| | Part Number | Elec. Ratings | Part Number | Elec. Ratings | Part Number | Elec. Ratings | (In.) | (mm) |
| 1 | OK434/1 FV | 40A/600V (8AWG) | OK434/1 FV-LP | 30A/600V (10AWG) | OK434/1 FV-BC | 40A/600V (8AWG) | 0.29 | 7.3 |
| 2 | OK434/2 FV | | OK434/2 FV-LP | | OK434/2 FV-BC | | 0.76 | 19.3 |
| 3 | OK434/3 FV | | OK434/3 FV-LP | | OK434/3 FV-BC | | 1.23 | 31.3 |
| 4 | OK434/4 FV | | OK434/4 FV-LP | | OK434/4 FV-BC | | 1.70 | 43.3 |
| 5 | OK434/5 FV | | OK434/5 FV-LP | | OK434/5 FV-BC | | 2.18 | 55.3 |
| 6 | OK434/6 FV | | OK434/6 FV-LP | | OK434/6 FV-BC | | 2.65 | 67.3 |
| 7 | OK434/7 FV | 57A/450V (10mm ²) | OK434/7 FV-LP | 41A/450V (6mm ²) | OK434/7 FV-BC | 57A/450V (10mm ²) | 3.12 | 79.3 |
| 8 | OK434/8 FV | | OK434/8 FV-LP | | OK434/8 FV-BC | | 3.59 | 91.3 |
| 9 | OK434/9 FV | | OK434/9 FV-LP | | OK434/9 FV-BC | | 4.07 | 103.3 |
| 10 | OK434/10 FV | | OK434/10 FV-LP | | OK434/10 FV-BC | | 4.54 | 115.3 |
| 11 | OK434/11 FV | | OK434/11 FV-LP | | OK434/11 FV-BC | | 5.01 | 127.3 |
| 12 | OK434/12 FV | | OK434/12 FV-LP | | OK434/12 FV-BC | | 5.48 | 139.3 |

