

# OK438 NY Series


18mm Center-to-Center Spacing

## General Information

KORNER OK 434 NY-H Series, UL File E73420 (Distributed by Curtis Industries)

## Material Information

- -LP Designates Wire Protection,
- Body: Natural Polyamide, PA6.6 (Nylon)
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 2.4 Nm (21 inch lbs) Per UL 1059
- Rated Temperature: 105°C Max
- Flame Rating: UL94 V2

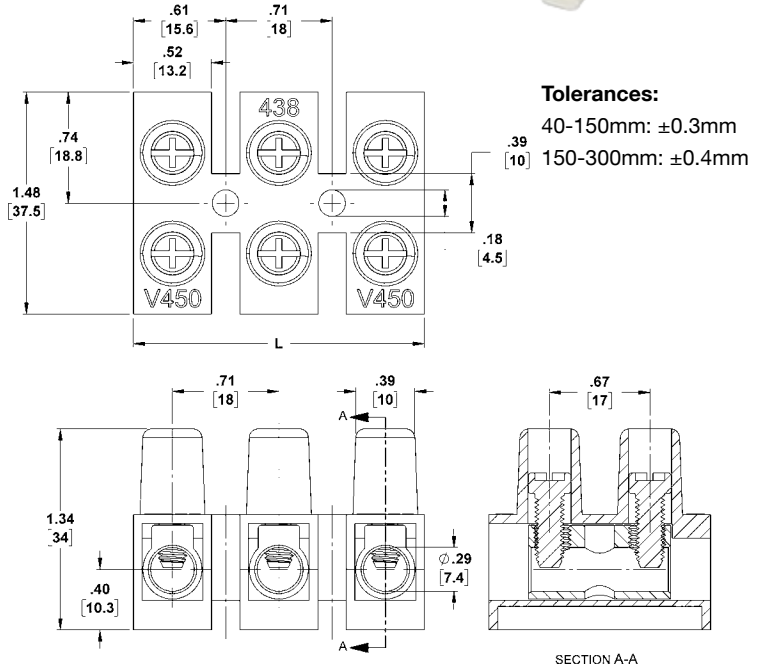

## Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1



T 115°C / UL 486 E

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK438/1 NY	80A/600V (4AWG)	OK438/1 NY-LP	85A/600V (4AWG)	0.52	13.2
2	OK438/2 NY		OK438/2 NY-LP		1.23	31.2
3	OK438/3 NY		OK438/3 NY-LP		1.94	49.2
4	OK438/4 NY	101A/450V (25mm <sup>2</sup> )	OK438/4 NY-LP	76A/450V (16mm <sup>2</sup> )	2.65	67.2
6	OK438/6 NY		OK438/6 NY-LP		4.06	103.2
12	OK438/12 NY		OK438/12 NY-LP		8.31	211.2

