

# OK432 NY Series

## 10.0mm Center-to-Center Spacing

### General Information

KORNER OK 432 NY Series, UL File E73420  
(Distributed by Curtis Industries)

### Material Information

- -LP Designates Wire Protection.
- Body: Natural Polyamide, PA6.6 (Nylon)
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.7 Nm (6.2 inch lbs) Per UL 1059
- Rated Temperature: 115°C Max
- Flame Rating: UL94 V2


### Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1



T 115°C / UL 486 E

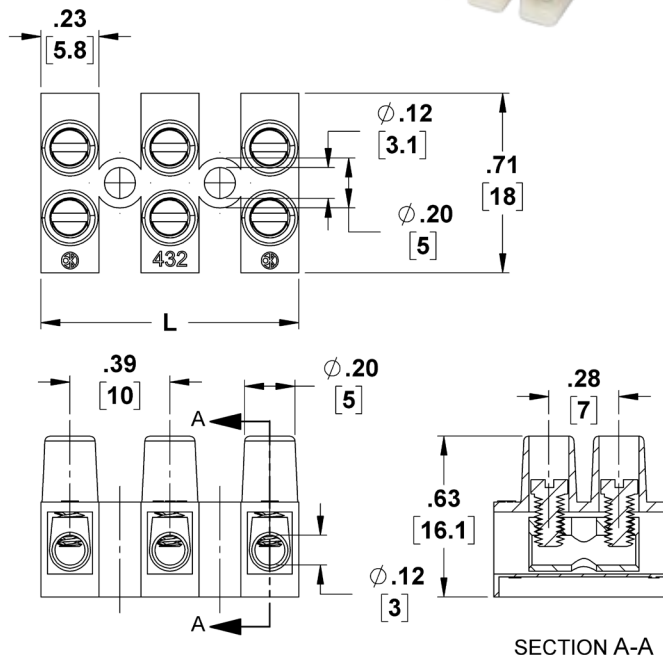

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK432/1 NY	15A/600V (14AWG)	OK432/1 NY-LP	15A/600V (14AWG)	0.23	5.8
2	OK432/2 NY		OK432/2 NY-LP		0.62	15.8
3	OK432/3 NY		OK432/3 NY-LP		1.01	25.8
4	OK432/4 NY		OK432/4 NY-LP		1.41	35.8
5	OK432/5 NY		OK432/5 NY-LP		1.80	45.8
6	OK432/6 NY		OK432/6 NY-LP		2.20	55.8
7	OK432/7 NY	24A/450V (2.5mm <sup>2</sup> )	OK432/7 NY-LP	24A/450V (2.5mm <sup>2</sup> )	2.59	65.8
8	OK432/8 NY		OK432/8 NY-LP		2.98	75.8
9	OK432/9 NY		OK432/9 NY-LP		3.38	85.8
10	OK432/10 NY		OK432/10 NY-LP		3.77	95.8
11	OK432/11 NY		OK432/11 NY-LP		4.17	105.8
12	OK432/12 NY		OK432/12 NY-LP		4.56	115.8