

# OK433 NY-H Series

10.0mm Center-to-Center Spacing




## General Information

KORNER OK 433 NY-H Series, UL File E73420  
(Distributed by Curtis Industries)

## Material Information

- LP Designates Wire Protection, -BC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon)
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 0.8 Nm (7 inch lbs) Per UL 1059
- Rated Temperature: 115°C Max
- Flame Rating: UL94 V2

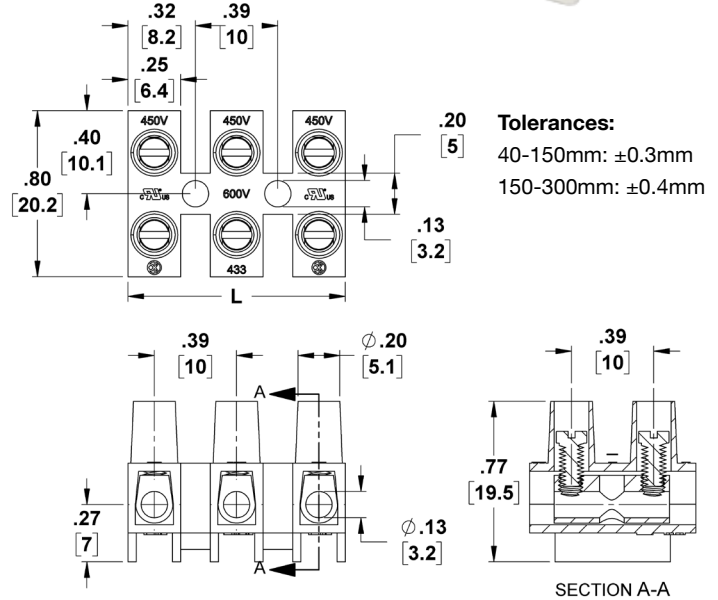

## Safety Approvals



Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		with Wire Stops (-BC)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK433/1 NY-H	20A/600V (12AWG)	OK433/1 NY-HLP	20A/600V (12AWG)	OK433/1 NY-HBC	20A/600V (12AWG)	0.25	6.4
2	OK433/2 NY-H		OK433/2 NY-HLP		OK433/2 NY-HBC		0.65	16.4
3	OK433/3 NY-H		OK433/3 NY-HLP		OK433/3 NY-HBC		1.04	26.4
4	OK433/4 NY-H		OK433/4 NY-HLP		OK433/4 NY-HBC		1.43	36.4
5	OK433/5 NY-H		OK433/5 NY-HLP		OK433/5 NY-HBC		1.83	46.4
6	OK433/6 NY-H		OK433/6 NY-HLP		OK433/6 NY-HBC		2.22	56.4
7	OK433/7 NY-H	32A/450V (4mm <sup>2</sup> )	OK433/7 NY-HLP	24A/450V (2.5mm <sup>2</sup> )	OK433/7 NY-HBC	32A/450V (4mm <sup>2</sup> )	2.61	66.4
8	OK433/8 NY-H		OK433/8 NY-HLP		OK433/8 NY-HBC		3.01	76.4
9	OK433/9 NY-H		OK433/9 NY-HLP		OK433/9 NY-HBC		3.40	86.4
10	OK433/10 NY-H		OK433/10 NY-HLP		OK433/10 NY-HBC		3.80	96.4
11	OK433/11 NY-H		OK433/11 NY-HLP		OK433/11 NY-HBC		4.19	106.4
12	OK433/12 NY-H		OK433/12 NY-HLP		OK433/12 NY-HBC		4.58	116.4

