

OK435 FV Series

14.5mm Center-to-Center Spacing




General Information

KORNER OK 435 FV Series, UL File E73420 (Distributed by Curtis Industries)

Material Information

- LP Designates Wire Protection, -BC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon) with 15% glass fiber
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 1.2 Nm (10 inch lbs) Per UL 1059
- Rated Temperature: 150°C Max
- Flame Rating: UL94 V0

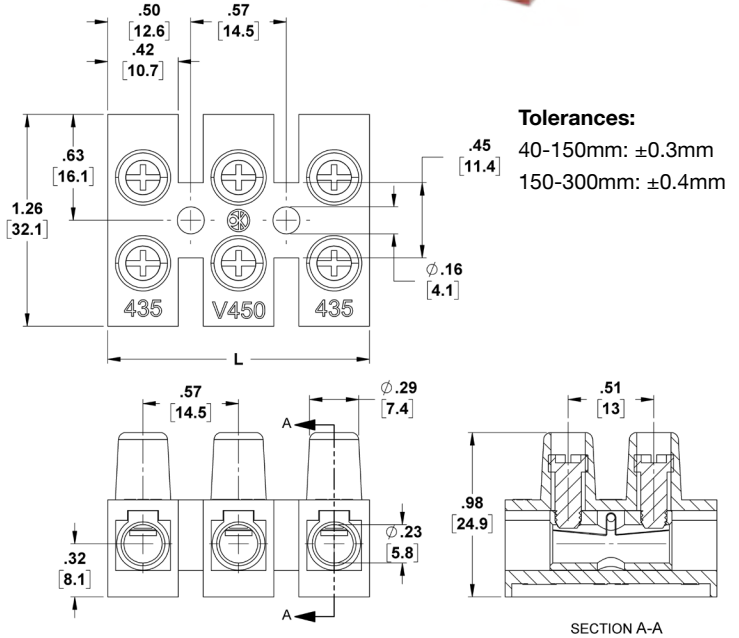

Safety Approvals



Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		with Wire Stops (-BC)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK435/1 FV	65A/600V (6AWG)	OK435/1 FV-LP	65A/600V (6AWG)	OK435/1 FV-BC	65A/600V (6AWG)	0.42	10.7
2	OK435/2 FV		OK435/2 FV-LP		OK435/2 FV-BC		0.99	25.2
3	OK435/3 FV		OK435/3 FV-LP		OK435/3 FV-BC		1.56	39.7
4	OK435/4 FV		OK435/4 FV-LP		OK435/4 FV-BC		2.13	54.2
5	OK435/5 FV		OK435/5 FV-LP		OK435/5 FV-BC		2.70	68.7
6	OK435/6 FV		OK435/6 FV-LP		OK435/6 FV-BC		3.28	83.2
7	OK435/7 FV	76A/450V (16mm ²)	OK435/7 FV-LP	57A/450V (10mm ²)	OK435/7 FV-BC	76A/450V (16mm ²)	3.85	97.7
8	OK435/8 FV		OK435/8 FV-LP		OK435/8 FV-BC		4.42	112.2
9	OK435/9 FV		OK435/9 FV-LP		OK435/9 FV-BC		4.99	126.7
10	OK435/10 FV		OK435/10 FV-LP		OK435/10 FV-BC		5.56	141.2
11	OK435/11 FV		OK435/11 FV-LP		OK435/11 FV-BC		6.13	155.7
12	OK435/12 FV		OK435/12 FV-LP		OK435/12 FV-BC		6.70	170.2

