

OK435 NY Series

14.5mm Center-to-Center Spacing

General Information

KORNER OK 435 Series, UL File E73420
(Distributed by Curtis Industries)

Material Information


- LP Designates Wire Protection, -BC Designates Wire Stops (UL/cUL approval pending) (Options are mutually exclusive and cannot be combined.)
- Body: Natural Polyamide, PA6.6 (Nylon)
- Inserts: Brass, Nickel-Plated, with Stainless Steel Plate (-LP)
- Screws: Steel, Zinc-Plated
- Min. Torque Requirement: 1.2 Nm (10.6 inch lbs) Per UL 1059
- Rated Temperature: 115°C Max
- Flame Rating: UL94 V2

Safety Approvals



CEI EN 60998-1 / CEI EN 60998-2-1

T 115°C / UL 486 E

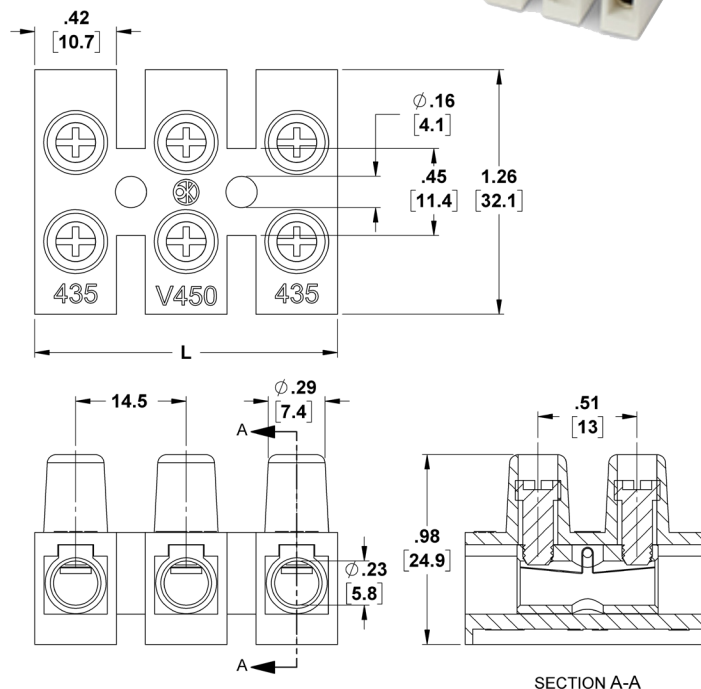

Number of Terminals	Standard Terminal Strip		with Wire Protector (-LP)		with Wire Stops (-BC)		Length (L)	
	Part Number	Elec. Ratings	Part Number	Elec. Ratings	Part Number	Elec. Ratings	(In.)	(mm)
1	OK435/1 NY	65A/600V (6AWG)	OK435/1 NY-LP	65A/600V (6AWG)	OK435/1 NY-BC	65A/600V (6AWG)	0.42	10.7
2	OK435/2 NY		OK435/2 NY-LP		OK435/2 NY-BC		0.99	25.2
3	OK435/3 NY		OK435/3 NY-LP		OK435/3 NY-BC		1.56	39.7
4	OK435/4 NY		OK435/4 NY-LP		OK435/4 NY-BC		2.13	54.2
5	OK435/5 NY		OK435/5 NY-LP		OK435/5 NY-BC		2.70	68.7
6	OK435/6 NY		OK435/6 NY-LP		OK435/6 NY-BC		3.28	83.2
7	OK435/7 NY	76A/450V (16mm ²)	OK435/7 NY-LP	57A/450V (10mm ²)	OK435/7 NY-BC	76A/450V (16mm ²)	3.85	97.7
8	OK435/8 NY		OK435/8 NY-LP		OK435/8 NY-BC		4.42	112.2
9	OK435/9 NY		OK435/9 NY-LP		OK435/9 NY-BC		4.99	126.7
10	OK435/10 NY		OK435/10 NY-LP		OK435/10 NY-BC		5.56	141.2
11	OK435/11 NY		OK435/11 NY-LP		OK435/11 NY-BC		6.13	155.7
12	OK435/12 NY		OK435/12 NY-LP		OK435/12 NY-BC		6.70	170.2

